


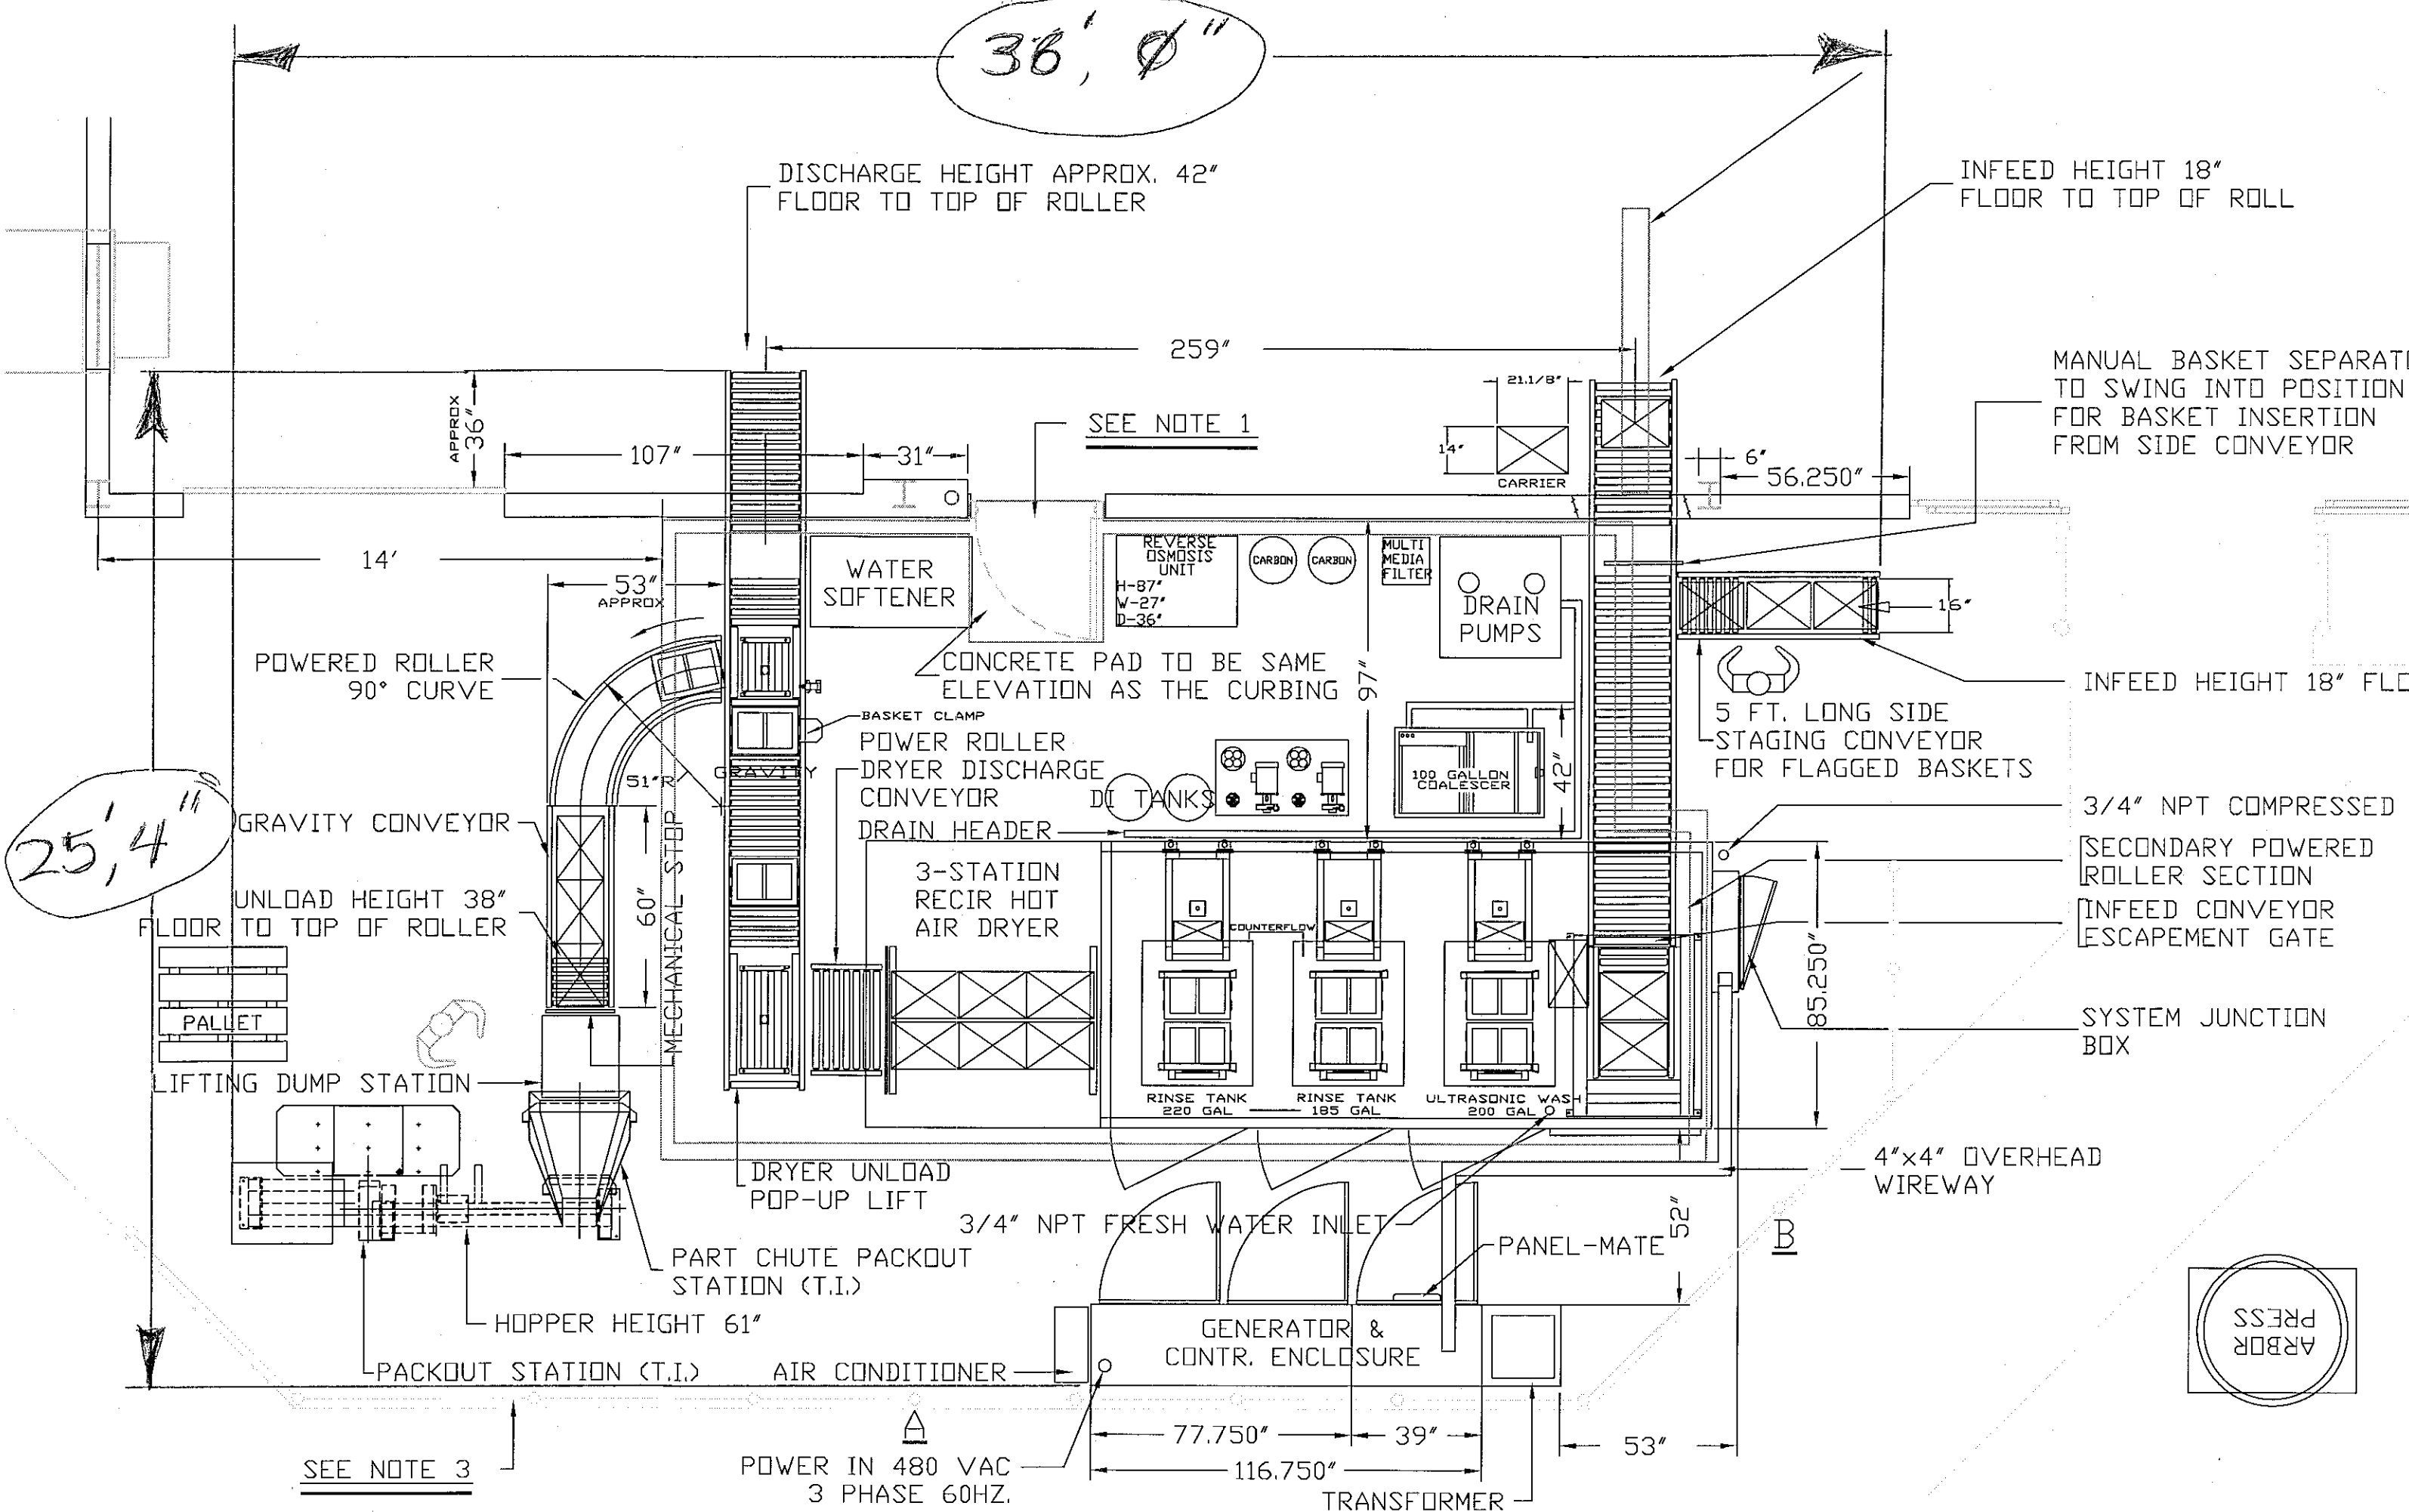

36' 0"

25' 4"

DISCHARGE HEIGHT APPROX. 42"
FLOOR TO TOP OF ROLLER

INFEED HEIGHT 18"
FLOOR TO TOP OF ROLL

SEE NOTE 1

APPROX 36"

107"

31"

21 1/8"
14"
CARRIER

6"
56.250"

MANUAL BASKET SEPARATOR
TO SWING INTO POSITION
FOR BASKET INSERTION
FROM SIDE CONVEYOR

14'

53"
APPROX

WATER
SOFTENER

REVERSE
OSMOSIS
UNIT
H-87"
W-27"
D-36"

CARBON

CARBON

MULTI
MEDIA
FILTER

DRAIN
PUMPS

CONCRETE PAD TO BE SAME
ELEVATION AS THE CURBING

97"

POWERED ROLLER
90° CURVE

51"

BASKET CLAMP
POWER ROLLER
DRYER DISCHARGE
CONVEYOR
DRAIN HEADER

DI TANKS

100 GALLON
COALESCER

5 FT. LONG SIDE
STAGING CONVEYOR
FOR FLAGGED BASKETS

INFEED HEIGHT 18" FLO

GRAVITY CONVEYOR

UNLOAD HEIGHT 38"
FLOOR TO TOP OF ROLLER

MECHANICAL STEP
60"

3-STATION
RECIR HOT
AIR DRYER

COUNTERFLOW

RINSE TANK
220 GAL

RINSE TANK
195 GAL

ULTRASONIC WASH
200 GAL

3/4" NPT COMPRESSED
SECONDARY POWERED
ROLLER SECTION
INFEED CONVEYOR
ESCAPEMENT GATE

SYSTEM JUNCTION
BOX

PALLET

LIFTING DUMP STATION

DRYER UNLOAD
POP-UP LIFT

PART CHUTE PACKOUT
STATION (T.I.)

HOPPER HEIGHT 61"

PACKOUT STATION (T.I.)

AIR CONDITIONER

3/4" NPT FRESH WATER INLET

GENERATOR &
CONTR. ENCLOSURE

PANEL-MATE

4"x4" OVERHEAD
WIREWAY

SEE NOTE 3

POWER IN 480 VAC
3 PHASE 60HZ.

77.750"

39"

116.750"

TRANSFORMER

53"

RECONFIGURED ATSI F

