
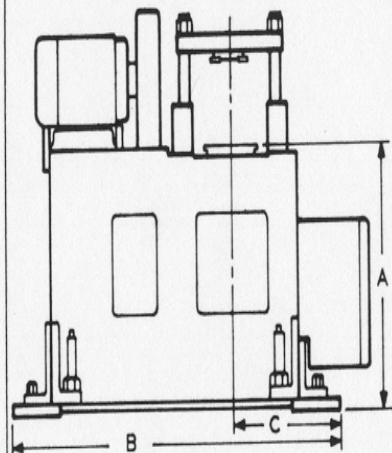





|                             |                    |                    |                    |
|-----------------------------|--------------------|--------------------|--------------------|
| Maximum Width of Cut        | 2                  | 3                  | 4                  |
| "A" Dim. Floor to Die Adj.  | 33-38              | 33-38              | 33-38              |
| "B" Dim. Base Plate Width   | 33                 | 42                 | 48                 |
| "C" Dim. Adjustable         | 9 1/4-12 1/4       | 13-16              | 14 1/2-17 1/2      |
| "D" Dim. Base Plate Length  | 24 1/2             | 28 1/2             | 28 1/2             |
| "E" Dimension               | 9                  | 12                 | 12                 |
| Motor Size and Speed        | 1HP<br>1200<br>RPM | 2HP<br>1200<br>RPM | 3HP<br>1200<br>RPM |
| Floor Space—Approx.         | 25x37              | 29x47              | 29x53              |
| Shipping Wt. (lbs.)—Approx. | 1200               | 1875               | 2100               |
| SPECIAL SIZES AVAILABLE     |                    |                    |                    |

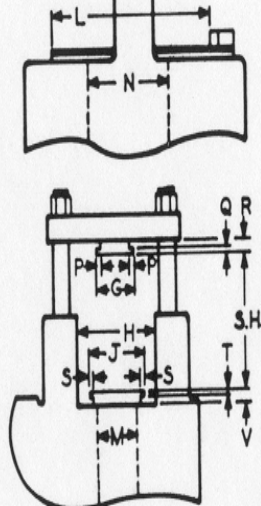

|      |       |       |             |
|------|-------|-------|-------------|
| J    | 4250  | 5000  | 6000        |
| K    | 9     | 12    | 12          |
| L    | 11    | 14    | 14          |
| M    | 2 1/4 | 3 1/2 | 4 1/4       |
| N    | 6     | 7 1/4 | 7 1/4       |
| P    | 7/16  | 1/2   | 1/2         |
| Q    | .365  | .365  | .365        |
| R    | 3/4   | 3/4   | 3/4         |
| S    | 5/16  | 5/16  | 5/16        |
| T    | .240  | .240  | .240        |
| V    | 3/4   | 3/4   | 7/8         |
| S.H. | 4-5   | 4-5   | 4 1/2-5 1/2 |

## Specifications FOUR-POST 2, 4 and 6 Series

| DESCRIPTION*                | CO-2<br>—4         | CO-4<br>—4         | CO-6<br>—4         |
|-----------------------------|--------------------|--------------------|--------------------|
| Approximate Tonnage         | 6                  | 12                 | 18                 |
| Standard Stroke             | 1 1/2              | 2                  | 2                  |
| Maximum Width of Cut        | 2                  | 3                  | 4                  |
| "A" Dim. Floor to Die Adj.  | 33-39              | 33-38              | 33-38              |
| "B" Dim. Base Plate Width   | 33                 | 42                 | 48                 |
| "C" Dim. Adjustable         | 9 1/4x12 1/4       | 13-16              | 14 1/2x17 1/2      |
| "D" Dim. Base Plate Length  | 24 1/2             | 28 1/2             | 28 1/2             |
| "E" Dimension               | 9                  | 12                 | 12                 |
| Motor Size and Speed        | 2HP<br>1200<br>RPM | 3HP<br>1200<br>RPM | 5HP<br>1200<br>RPM |
| Floor Space—Approx.         | 25x37              | 29x47              | 29x53              |
| Shipping Wt. (lbs.)—Approx. | 1350               | 2075               | 2350               |
| SPECIAL SIZES AVAILABLE     |                    |                    |                    |



| Sym. | CO-2<br>—4 | CO-4<br>—4 | CO-6<br>—4  |
|------|------------|------------|-------------|
| G    | 2 11/16    | 3 7/16     | 3 7/16      |
| H    | 5 1/4      | 7          | 9           |
| J    | 4250       | 5000       | 6000        |
| K    | 12         | 14         | 14          |
| L    | 14         | 16         | 16          |
| M    | 2 1/4      | 3 1/2      | 4 1/4       |
| N    | 8          | 10         | 10          |
| P    | 7/16       | 1/2        | 1/2         |
| Q    | .365       | .365       | .365        |
| R    | 3/4        | 3/4        | 3/4         |
| S    | 5/16       | 5/16       | 5/16        |
| T    | .240       | .240       | .240        |
| V    | 3/4        | 3/4        | 3/4         |
| W    | 6          | 8          | 8           |
| S.H. | 4-5        | 4-9        | 4 1/2-5 1/2 |

Shut-height range for cut-off machines in this series is controlled by adjustable links.

\*AIR OR MECHANICALLY OPERATED.

Stroke and shut-height indicated are standard. Machines with special stroke and shut-height can be furnished.

Filler plates for reducing shut-height or adapter plates for smaller die slides in larger machines are available as extras.

ALL DIMENSIONS IN INCHES.