

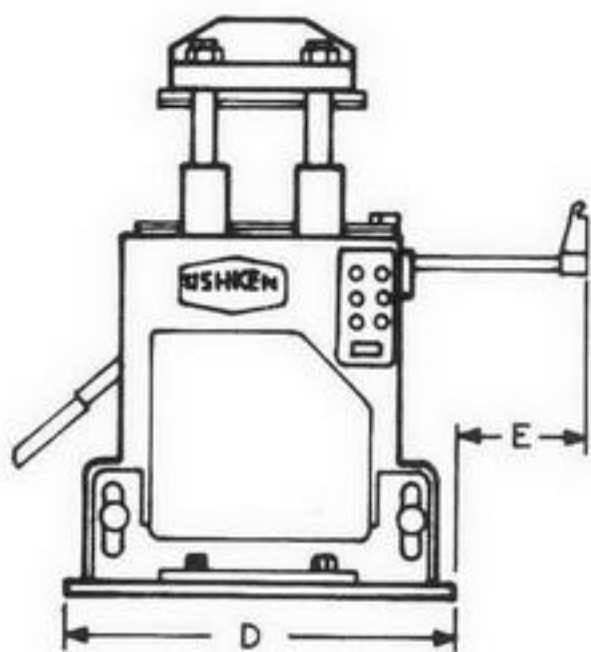
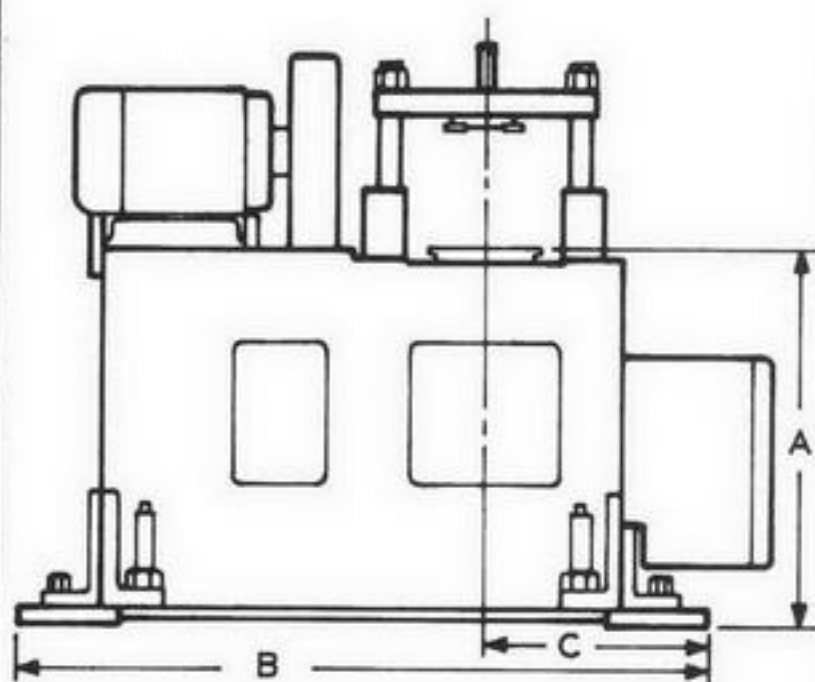


Specifications

TWO-POST 8 and 10 Series

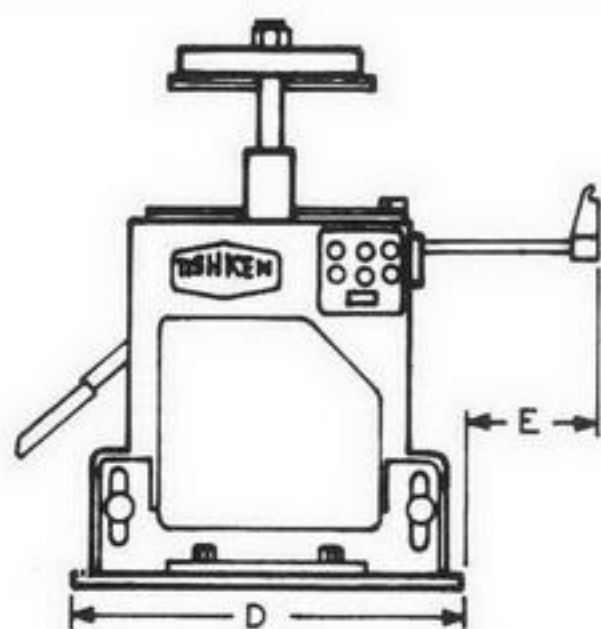

DESCRIPTION	CO-8 -2	CO-10 -2
Approximate Tonnage	25	25
Standard Stroke	2	2
Maximum Width of Cut	5	7
"A" Dim. Floor to Die Adj.	32-37	32-37
"B" Dim. Base Plate Width	32	34
"C" Dim. Adjustable	18½	19½
"D" Dim. Base Plate Length	53	60
"E" Dimension	12	12
Motor Size and Speed	5 HP 1200 RPM	5 HP 1200 RPM
Floor Space—Approx.	32x61	34x67
Shipping Wt. (lbs.)—Approx.	3450	3650
SPECIAL SIZES AVAILABLE		

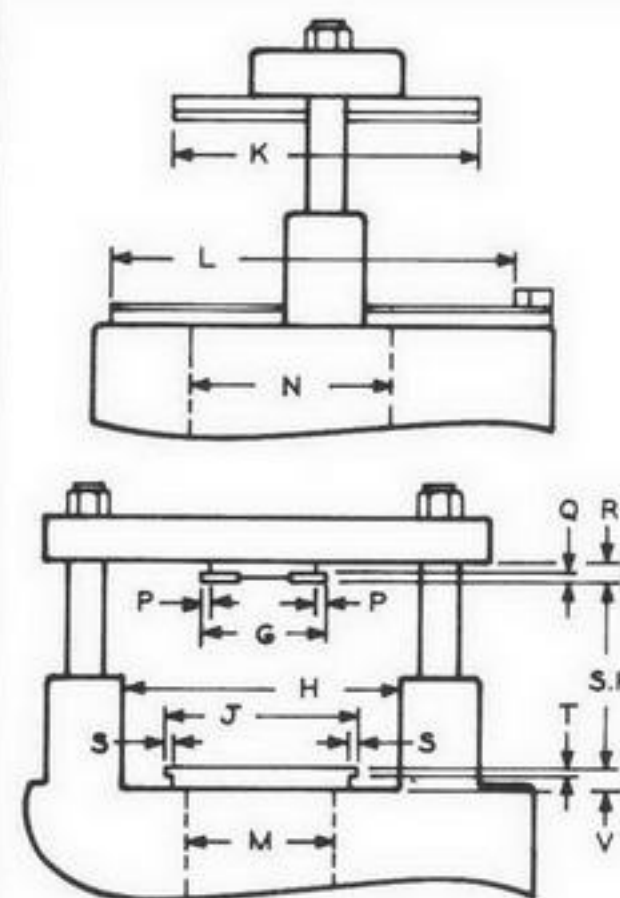


Sym.	CO-8 -2	CO-10 -2
G	4 ¹⁵ / ₁₆	6 ¹⁵ / ₁₆
H	11¼	13¼
J	7.992	7.992
K	16	16
L	20	20
M	5½	7
N	10½	10½
P	7 ⁷ / ₁₆	7 ⁷ / ₁₆
Q	.365	.365
R	1⅞	1⅞
S	5 ⁵ / ₁₆	5 ⁵ / ₁₆
T	.365	.365
V	1	1
S.H.	6 to 7	6 to 7

Specifications

FOUR-POST 8 and 10 Series

DESCRIPTION	CO-8 -4	CO-10 -4
Approximate Tonnage	25	25
Standard Stroke	2	2
Maximum Width of Cut	5	7
"A" Dim. Floor to Die Adj.	32-37	32-37
"B" Dim. Base Plate Width	32	34
"C" Dim. Adjustable	21	22½
"D" Dim. Base Plate Length	53	65
"E" Dimension	12	12
Motor Size and Speed	7½ HP 1200 RPM	7½ HP 1200 RPM
Floor Space—Approx.	32x67	34x73
Shipping Wt. (lbs.)—Approx.	3750	4000
SPECIAL SIZES AVAILABLE		

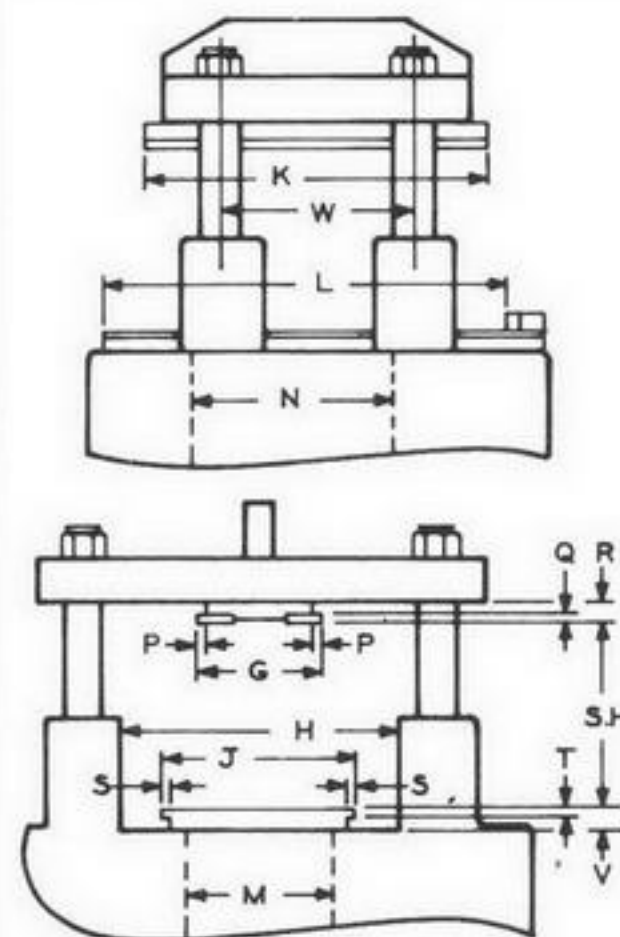

Sym.	CO-8 -4	CO-10 -4
G	4 ⁵ / ₁₆	6 ¹⁵ / ₁₆
H	11¼	13¼
J	7.992	7.992
K	18	18
L	20	20
M	5½	7
N	10½	10½
P	7 ⁷ / ₁₆	7 ⁷ / ₁₆
Q	.365	.365
R	1⅞	1⅞
S	5 ⁵ / ₁₆	5 ⁵ / ₁₆
T	.365	.365
V	1	1
W	8	10
S.H.	6 to 7	7 to 8

Shut-height range for cut-off machines in this series is controlled by adjustable links.

Stroke and shut-height indicated are standard. Machines with special stroke and shut-height can be furnished.

Filler plates for reducing shut-height or adapter plates for smaller die slides in larger machines are available as extras.
ALL DIMENSIONS IN INCHES.